

**JACK**

China No.1


Shanghai stock  
listed



Jack Wechat



Jack Sewing Machine Co.,LTD.

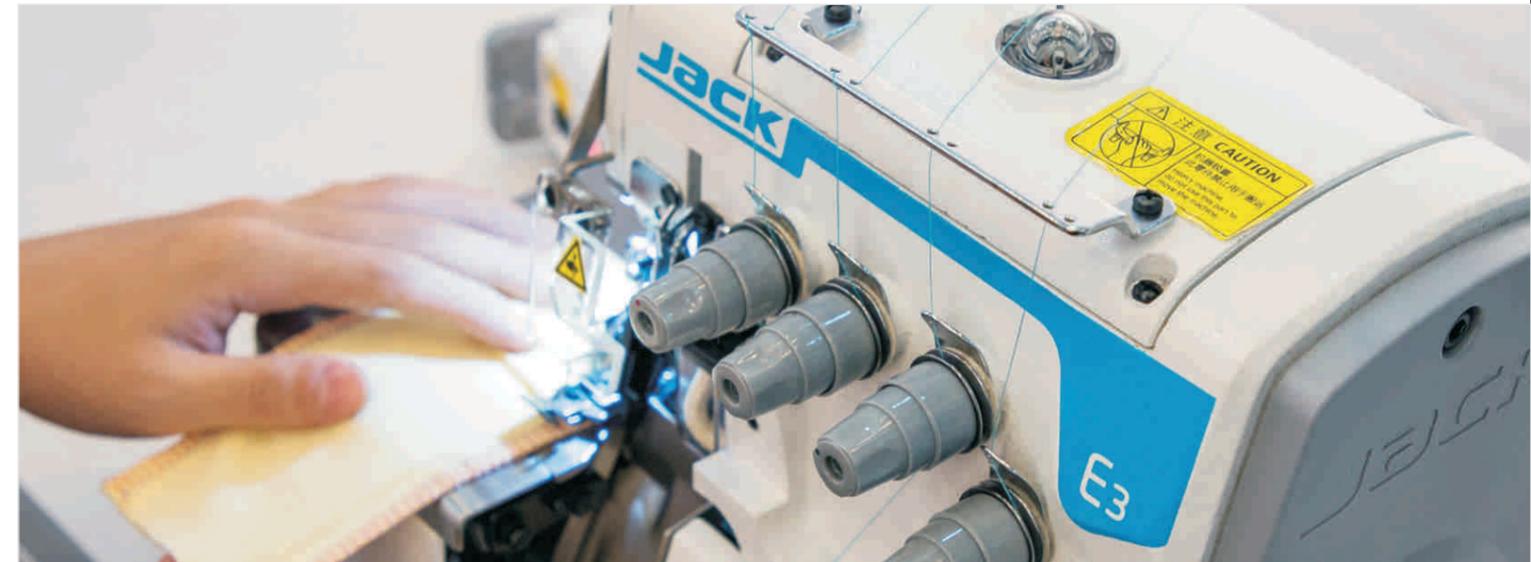

## High Speed Direct Drive Overlock Machine



E3

**JACK SEWING MACHINE CO.,LTD.**

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC  
TEL: 0086-576-88177782 88177767  
FAX: 0086-576-88177787

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
[www.chinajack.com](http://www.chinajack.com)

# E3



## High Speed Direct Drive Overlock Machine Power Saving, Easy operation



### Advantages:

#### 1 71% Power Saving


71% power saving. Use servo motor, compare with normal overlock, much safety and less maintenance, every year it saves 446KW/H. If per KW/H cost 1 RMB, totally it saves 459 RMB per year.

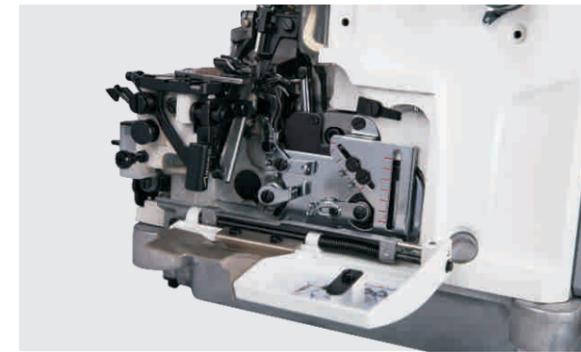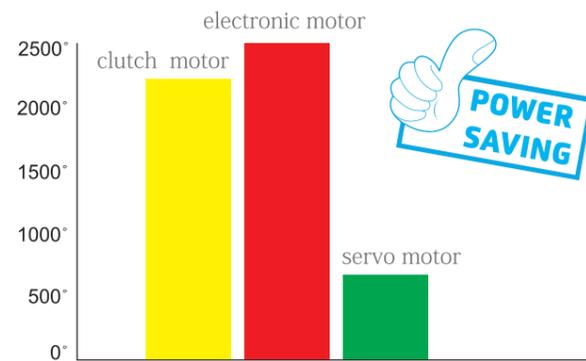

2 Optimized thread take-up mechanisms, beautiful sewing stitch  
Optimization for the system of thread take-up mechanisms to adjust the thread picking at different time. make sewing stitch more perfect. Only adjust tension devices is enough.



3 Fully enclosed needle bar oil return device, clean sewing  
Fully enclosed needle bar oil return device, blocking oil pollution, Clean and durable. Improve customer satisfaction.

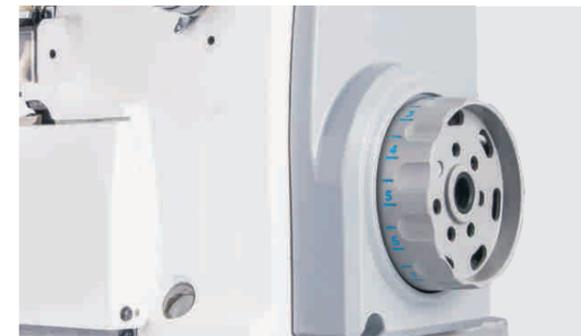

4 Integrated handwheel design  
The hand wheel is designed with fingerprint and big fan, low noise, which makes the motor cooling effect better and the machine easy to operate.



5 Easy operation, quick response  
Common parameter introduction is on the panel. Even new operator can quick start. Operate easily and response quickly.

### Technical parameters

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E3-3-M1-15	DCx27 11#	1	3	-	1.5	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-3-M2-04	DCx27 11#	1	3	-	4	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-3-M5-04BK	DCx27 11#	1	3	-	4	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-4-M5-23BK	DCx27 11#	1	4	2	3	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-4-M2-24	DCx27 11#	1	4	2	4	4.6	0.7-2	5.5	5500	495x355x545	27.6/36.7
E3-5-M2-35	DCx27 14#	2	5	3	5	4.6	0.7-2	5	5500	495x355x545	28.1/37.1
E3-5-M2-55	DCx27 14#	2	5	5	5	4.6	0.7-2	5	5500	495x355x545	28.1/37.1
E3-5x2-56	DCx27 14#	2	5	5	6	5	0.7-2	5	5500	495x355x545	28.1/37.1